



CLOUD LIT & NON-LIT

Fräsch was founded on the belief that creating healthy and beautiful office environments leads to a happier and highly motivated workforce.



CLOUD LIT & NON-LIT

Acoustical Ceiling Fixture

Create a layered aesthetic with a variety of shapes, sizes and colors that provide enhanced acoustic performance in open spaces. CLOUD LIT AND NON-LIT can stand alone or be paired together for a unique installation.

Application Ceiling Suspended

	L	W	H	WEIGHT
*CLOUD - CIRCLE		47"	2.75"	10 lbs.
*CLOUD - SQUARE	47"	47"	2.75"	15 lbs.
**CLOUD - HEX	45"	39"	2"	8 lbs.

*Custom Sizing Available. Lit Option= Add 5lbs.

**HEX CLOUD comes NON-LIT only

Hardware

Default: Sputnik, Jointed Griplock
Aircraft Cable/Threaded Rod, Coupler Nut,
Griplock, Hanger Bolt

Unistrut*: Unistrut, Cone Nut Assembly, Threaded Rod/
Aircraft Cable, Coupler Nut, Griplock

* Available Upon Request

Material Content 9 mm 100% PET (55% recycled content)

Flammability ASTM E84 Class A or B

Acoustics [CLOUD LIT]

Frequency (Hz)	250	500	1K	2K	NRC
NRC	0.74	0.06	1.54	1.77	1.30
Sabins per m ²	11.24	16.21	23.43	27.08	

Test was conducted while product was in its actual installation setting.

All NRC testings assumes one face/one object and does not account for the product thickness.

Environment

Low VOC;
Post-Consumer Recycled Content
100% Recyclable

Installation

CLOUD LIT and NON-LIT come with easy and flexible hanging options. Threaded Rod/Aircraft Cable, Sputnik, Jointed Griplock are included. The ceiling fastener is provided by an installer.

Country of Origin

USA

Warranty

2 Years


fräsch!

609 112th Street, Suite A
Arlington, TX 76011

CLOUD LIT

Lighting Specification

15" Round LED Light

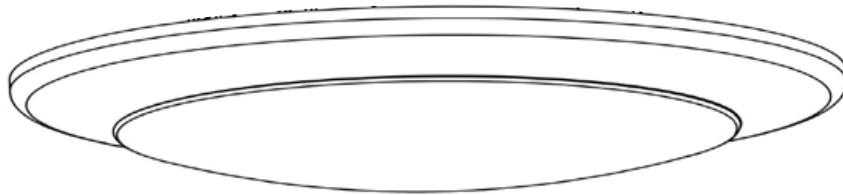


Color	Diffuser/Shielding	Finish	Lamp Included	Light Source	Lumens Range	Options	Size
30K	White	White	Yes	LED	2001 to 3000	Dimming	15"

SQUARE LIT

Lighting Specification


24" LED Edgelit Flat Panel Light

- Ultra thin LED panel light made from high-grade aluminum
- Environmentally-friendly, mercury-free
- IC Rated for dry and damp locations
- CRI >80 standard
- Multiple Kelvin temperatures available (3500K, 4000K, 5000K)
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V
- Power factor >0.90

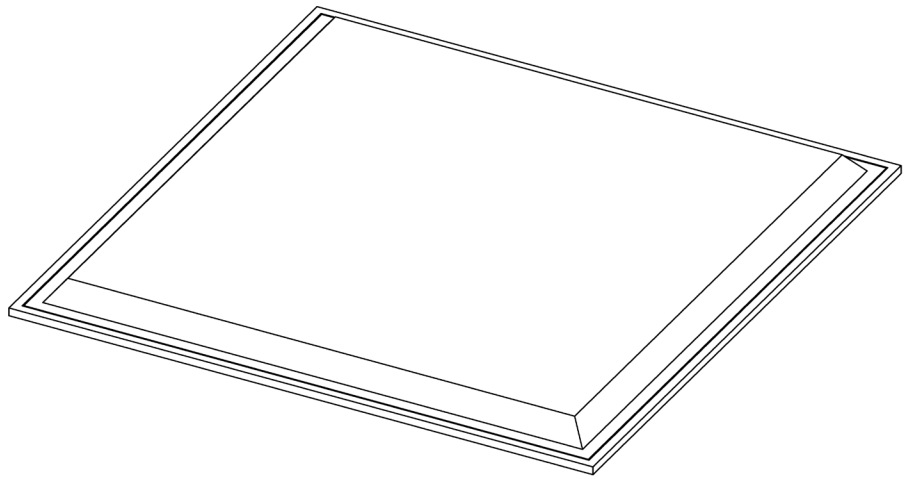


Color	Wattage	Size
40K	40 W	23.625" x 23.625"



CLOUD NON-LIT Dimensions

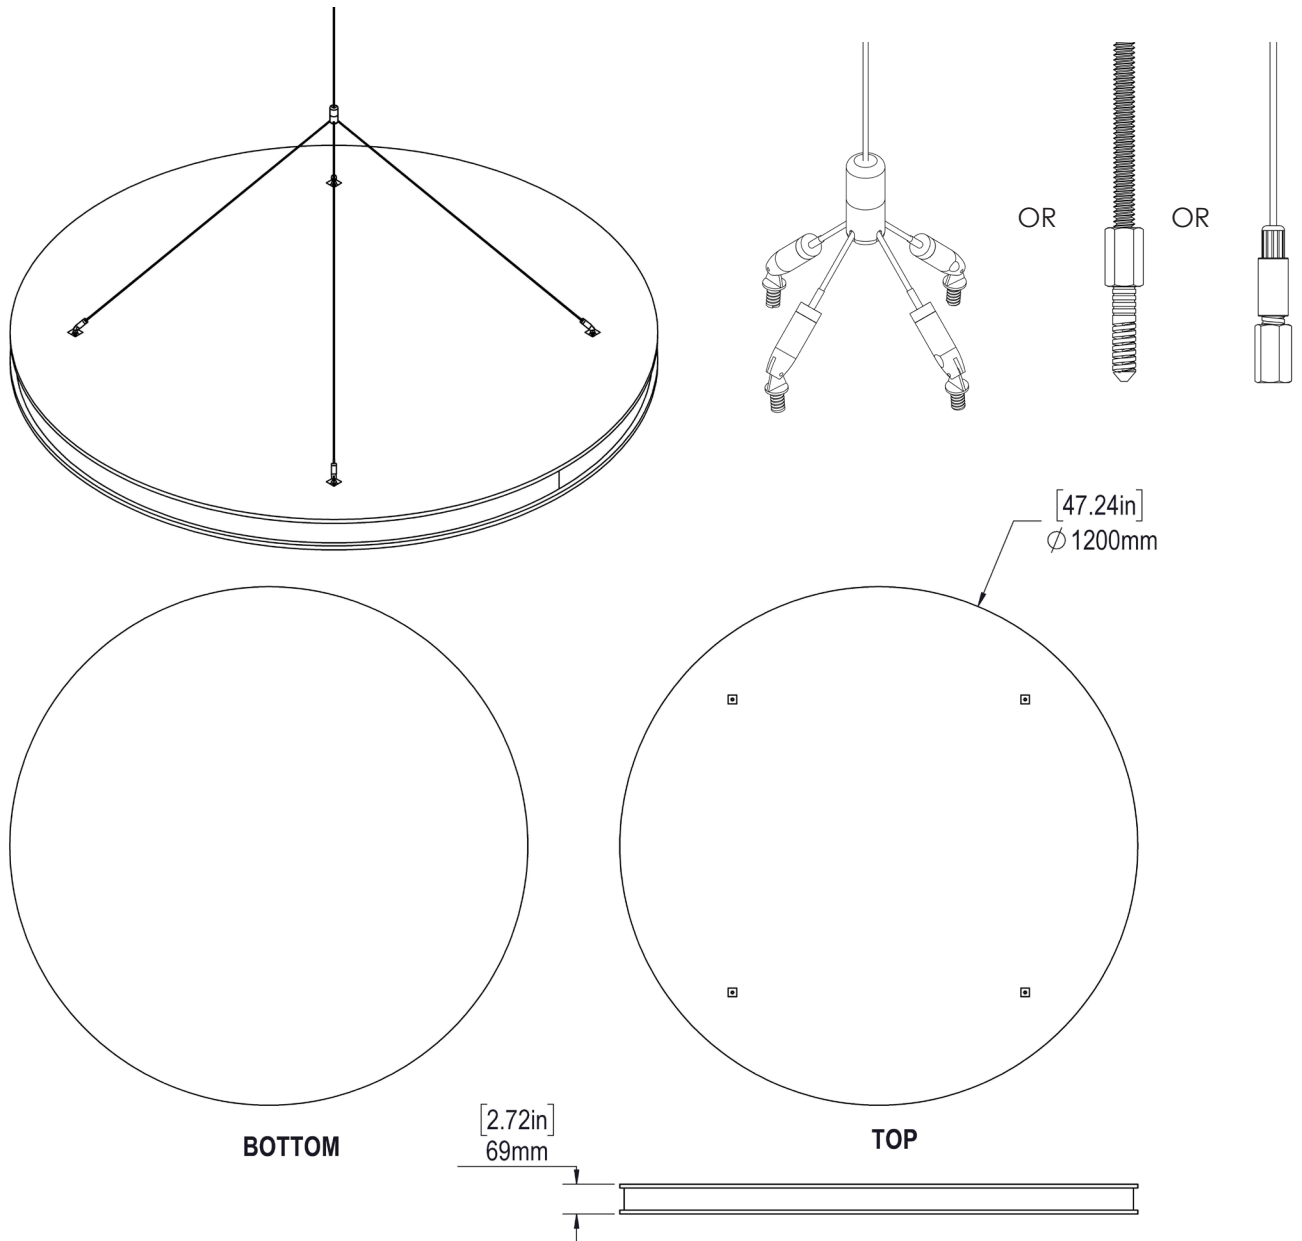

CLOUD LIT Dimensions

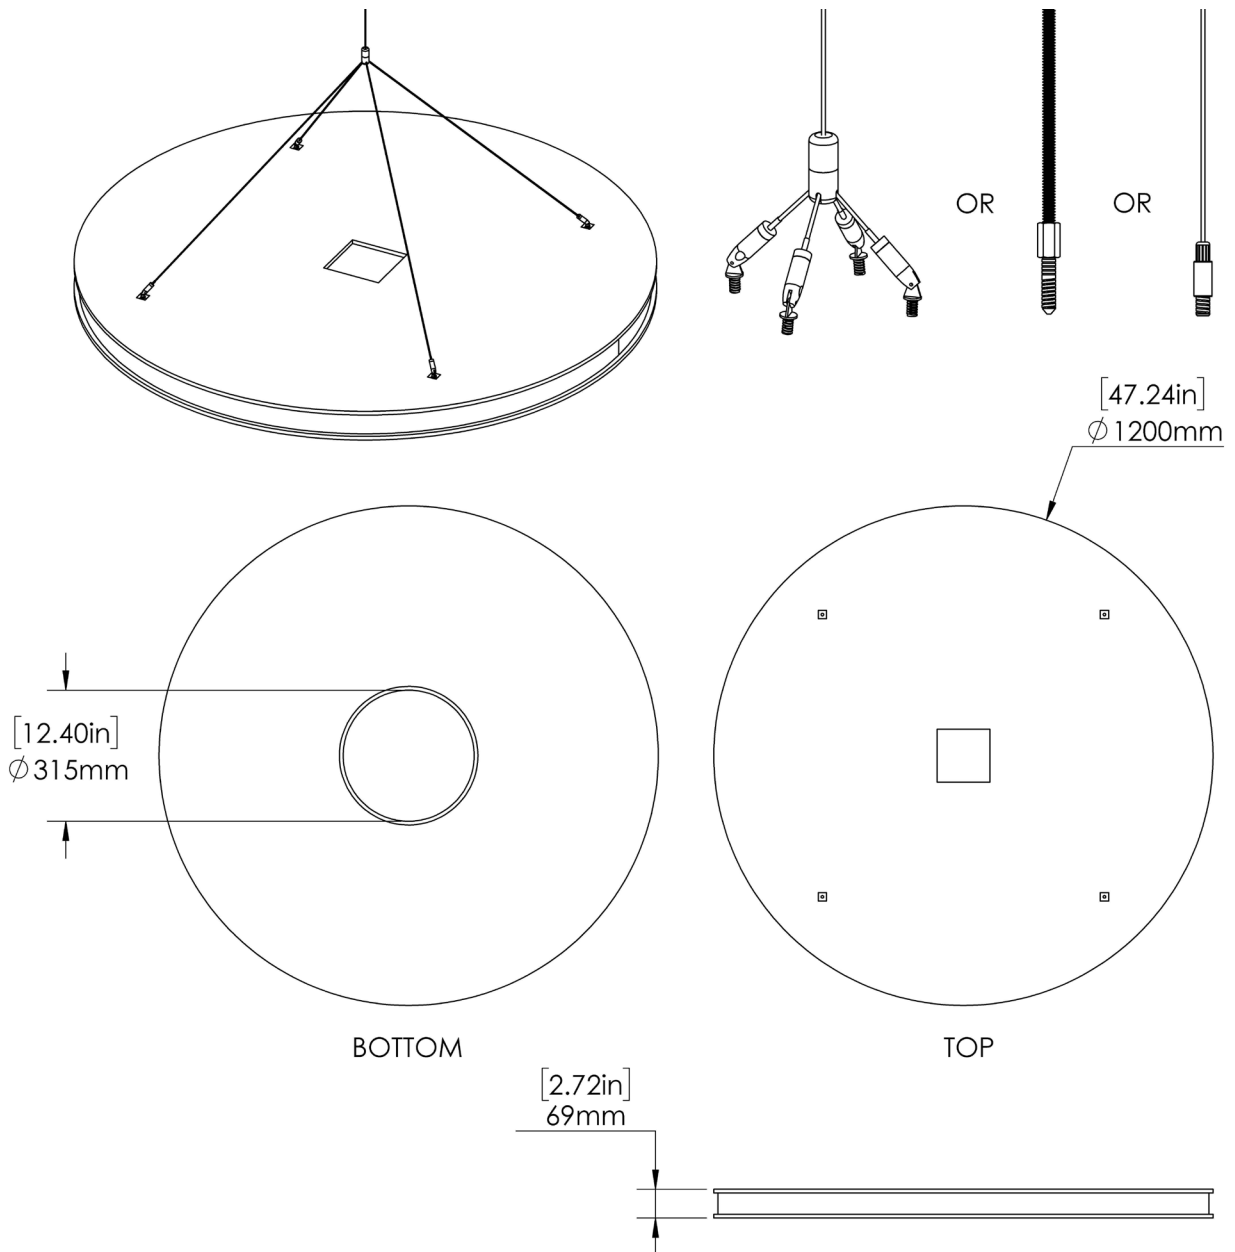


HEX CLOUD NON-LIT Dimensions

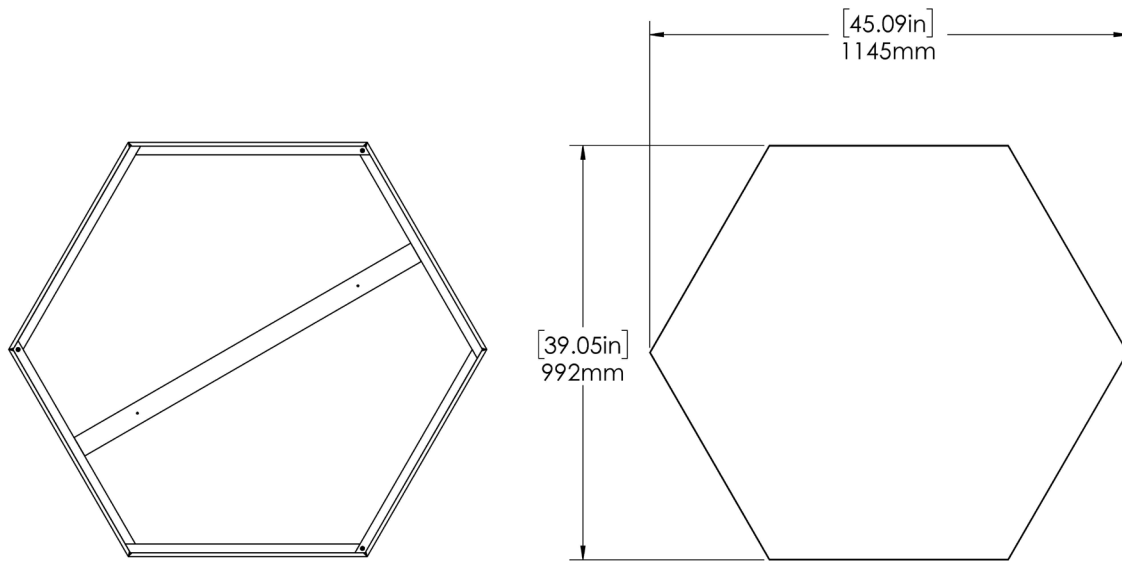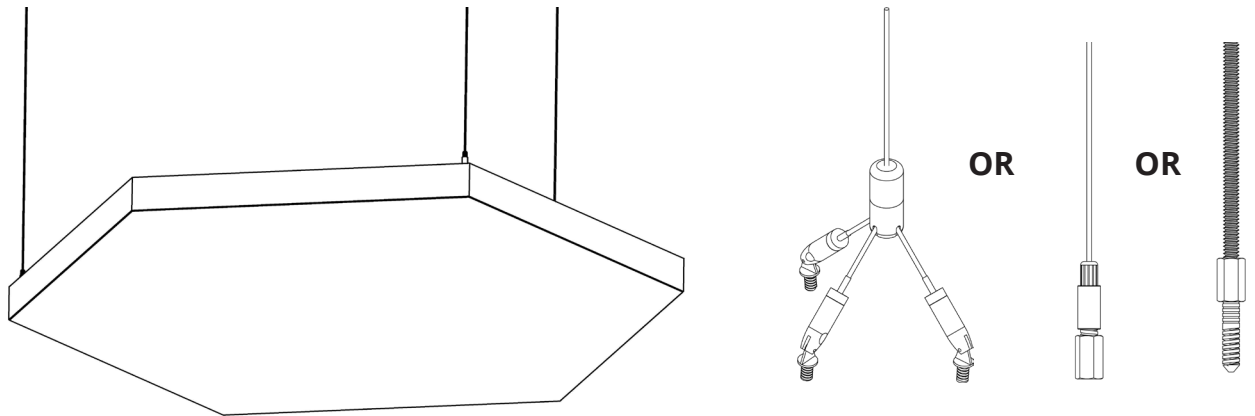




TOP

BOTTOM



SQUARE CLOUD NON-LIT

Dimensions

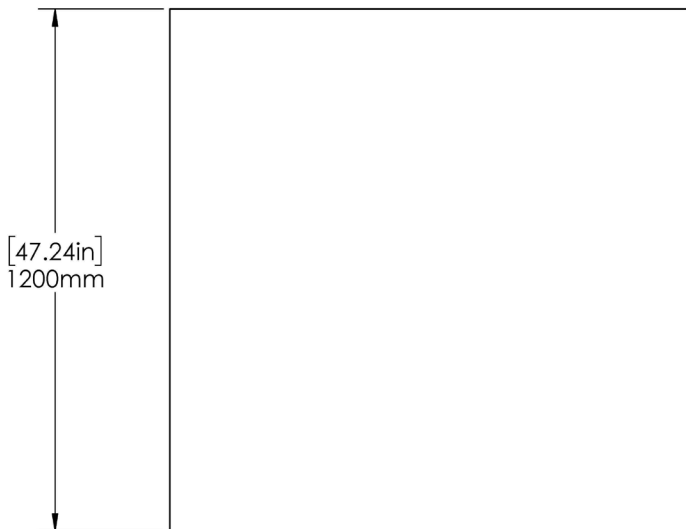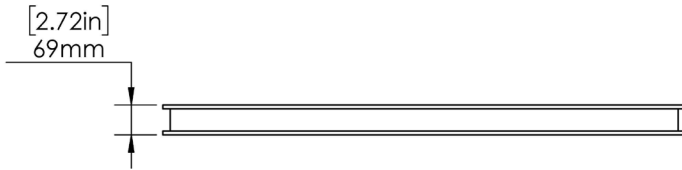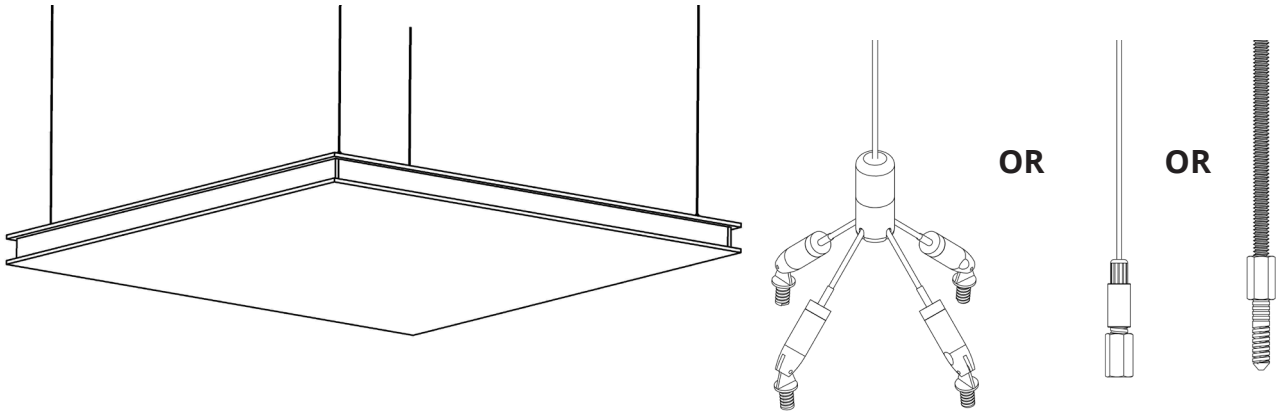

SQUARE CLOUD LIT Dimensions

