



DIAMOND

Fräsch was founded on the belief that creating healthy and beautiful office environments leads to a happier and highly motivated workforce.



DIAMOND

Acoustical Wall Tile

This simple yet beautiful geometric pattern adds depth and dimension to any environment. Tiles align tightly to form the overall shape. DIAMOND acoustic tiles can be positioned to form different patterns and alternating colors can create a dynamic wall treatment. Tiles glue easily to any wall.

Application Wall

	L	W	H	WEIGHT
DIAMOND	24"	13.5"	.35"	.35 lbs.

Custom sizing available up to 48"

Hardware

Default: Roberts 3095 Carpet Adhesive, Heavy Duty Liquid Nail

Material Content 9 mm 100% PET (55% recycled content)

Flammability ASTM E84 Class A or B

Acoustics

Frequency (Hz)	250	500	1K	2K	NRC
NRC	0.04	0.16	0.40	0.63	(0.3-0.75)
Sabins per m²	2.87	11.48	29.15	45.01	

Test was conducted while product was in its actual installation setting

All NRC testings assumes one face/one object and does not account for the product thickness

Environment

Low VOC
Post-Consumer Recycled Content
100% Recyclable

Installation

Simply glue one DIAMOND at a time; DIAMOND easily cuts to fit your wallspace. Another alternative is to lay out your space and mount the Impaler Clip to the wall with sheetrock screws and press DIAMOND to secure it to the wall.

Country of Origin

USA


Warranty

2 Years

fräsch!

609 112th Street, Suite A
Arlington, TX 76011

DIAMOND Dimensions

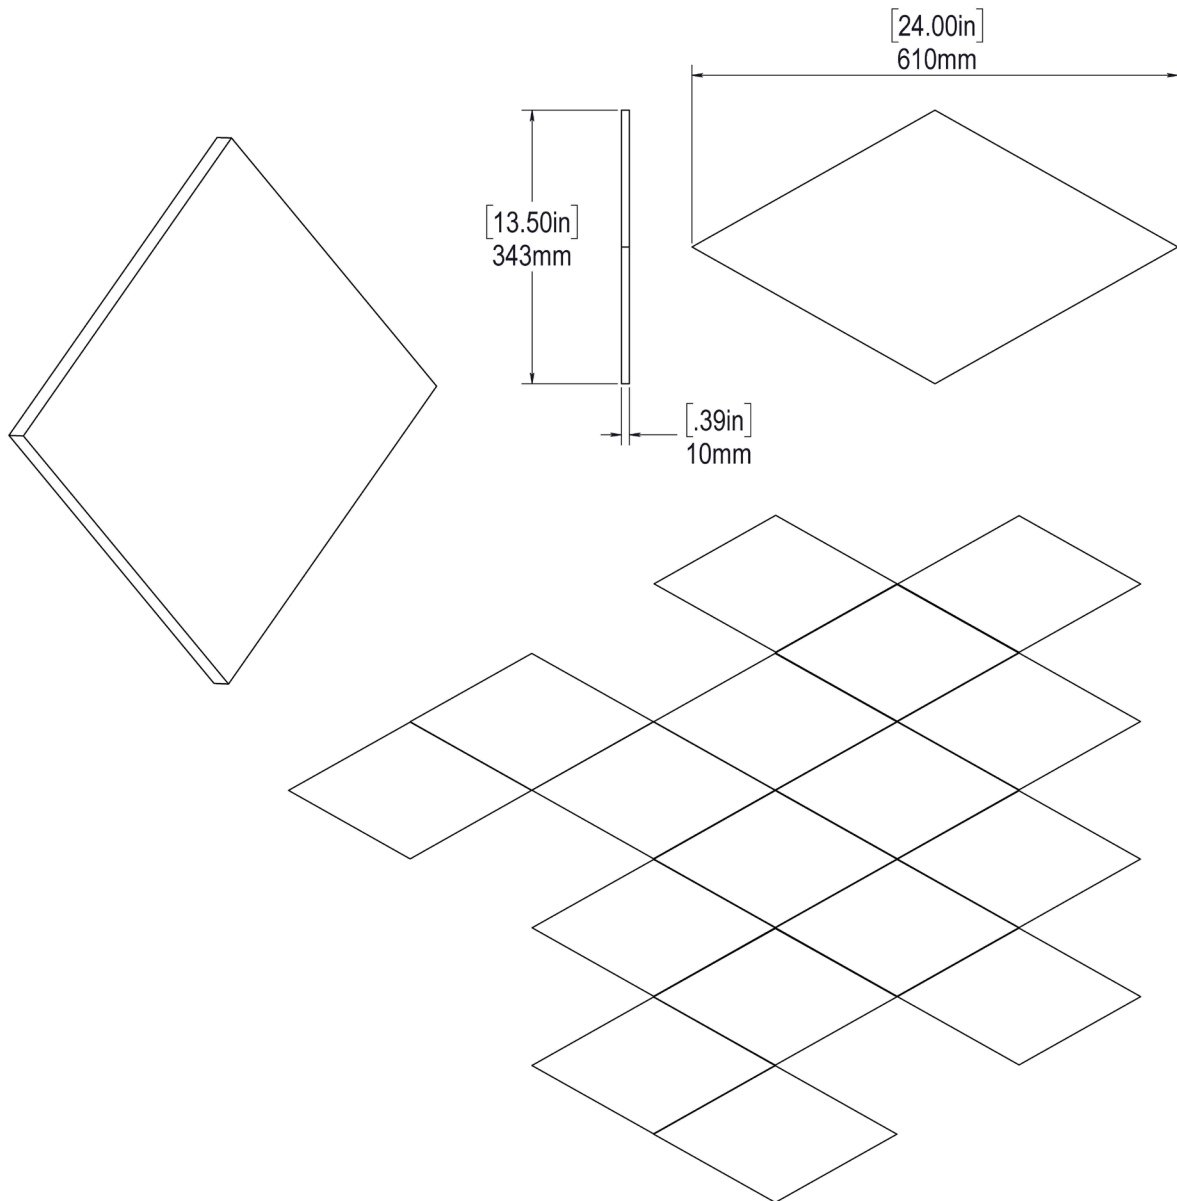

DIAMOND Installation

